


### LIQUID TIGHT FLEXIBLE CONDUIT

<b>Material</b>	HDG Steel + PVC compound
<b>Properties</b>	Excellent mechanical strength with flexible capabilities. This jacket is resistant to oil, acid and sea water. Color: Available In Black Temperature: -20 C to +70 C IP rating: IP 65
<b>Features</b>	Highly flexible steel conduit with Cotton Filling. Complete protection against most liquid and moisture vapours
<b>Applications</b>	<ul style="list-style-type: none"> <li>• Indoor and Outdoor Installations where liquid tight proofing is required</li> <li>• Cable management for conveyors, blowers, crane hoist, HVAC machine and equipments etc...</li> <li>• Concealed or exposed installations</li> <li>• Designed for both commercial and industrial applications.</li> </ul>

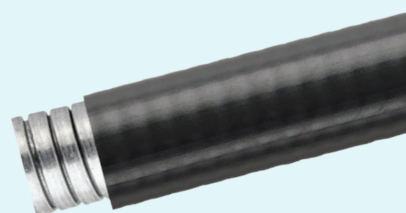

Item Code	Size	Internal Diameter (mm)	External Diameter (mm)	Min. Bend Radius (mm)	Coil Packing (M)
C-BSLTFMC016	16 mm	13	16	50	50
C-BSLTFMC020	20 mm	16	21	65	25
C-BSLTFMC025	25 mm	21	26	100	25
C-BSLTFMC032	32 mm	26	33	135	15
C-BSLTFMC040	40 mm	34	39	150	10
C-BSLTFMC050	50 mm	46	50	180	10